Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Nanoleaf

Supplier's address: Nanoleaf Europe, 11 Rue de Lourmel, 75015 Paris, FR

Model identifier: NL67E200

Type of light source:


Lighting technology used:	LED	Non-directional or directional:	NDLS		
Light source cap-type	E27				
(or other electric interface)					
Mains or non-mains:	MLS	Connected light source (CLS):	No		
Colour-tuneable light source:	Yes	Envelope:	-		
High luminance light source:	No				
Anti-glare shield:	Yes	Dimmable:	Yes		
Product parameters					


Developerator		Value		Malua		
Parameter		Value	Parameter	Value		
General product parameters:						
Energy consum mode (kWh/10 up to the neares	00 h), rounded	9	Energy efficiency class	F		
dicating if it refe	s flux (φuse), in- ers to the flux in , in a wide cone rrow cone (90º)	806 in Sphere (360°)	Correlated colour temperature, rounded to the near- est 100 K, or the range of correlat- ed colour temper- atures, rounded to the nearest 100 K, that can be set	27006500		
On-mode pow pressed in W	ver (P _{on}), ex-	9,0	Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal	0,30		
	andby power expressed in W the second dec-	-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	91		
Outer dimen-	Height	110	Spectral power dis-	See image		
sions without	Width	60	tribution in the	in last page		
separate con- trol gear, light- ing control	Depth	60	range 250 nm to 800 nm, at full-load			

parts and non- lighting con- trol parts, if any (millime- tre)						
Claim of equivalent power ^(a)	Yes	If yes, equivalent power (W)	60			
		Chromaticity coordi- nates (x and y)	0,460 0,409			
Parameters for LED and OLED light sources:						
R9 colour rendering index value	52	Survival factor	1,00			
the lumen maintenance factor	0,96					
Parameters for LED and OLED mains light sources:						
displacement factor (cos φ1)	0,89	Colour consistency in McAdam ellipses	5			
Claims that an LED light source replaces a fluorescent light source without integrated bal- last of a particular wattage.	_(b)	If yes then replace- ment claim (W)	-			
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,1			

(a)_{'-'} : not applicable;

(b)'_-' : not applicable;

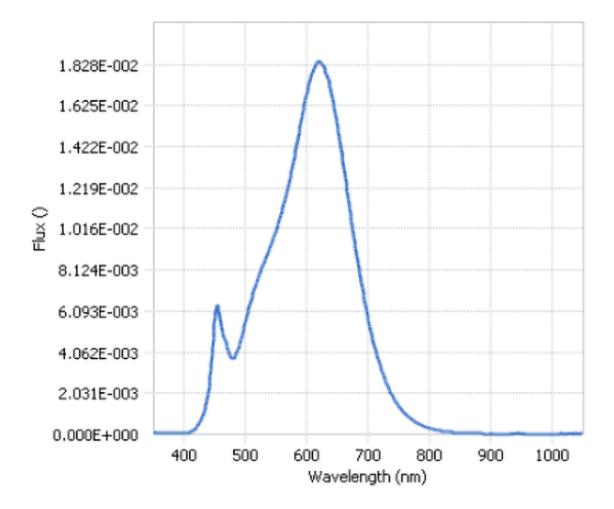

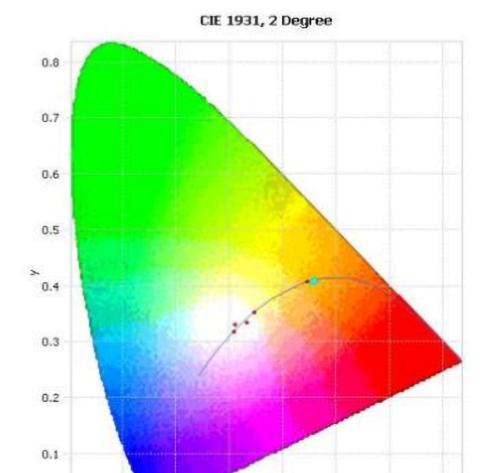

Page 3 / 3